

TC-TC-DUAL

THERMOCOUPLE ISOLATOR – 2 OUTPUTS



- Provides isolated thermocouple mV signals from a non-isolated thermocouple
- High Accuracy, Low Cost
- Ultra compact DIN Rail Mount Enclosure
- Prevents earth loop & sensor failure problems in multi-thermocouple installations

Description

The DUALCON-TC-TC isolator accepts a mV signal from virtually any type of thermocouple and provides two identical isolated mV signals. This is useful when a single thermocouple is used by two instruments.

Alternatively the unit can produce one mV output identical to the thermocouple signal and one high level 4-20mA or Voltage output.

Typically used where non-isolated thermocouples are monitored by a multi input channel device with no channel to channel isolation, the unit can eliminate earth loop effects and prevents the failure of one sensor affecting the other sensors.

Options include the linearization of the input mV signal and optional Cold Junction Compensation (CJC).

The unit is housed in a DIN-Rail mounting enclosure which is just 17.5mm wide. It has two power supply options operating either from a 12 to 36Vdc supply or 90 to 264Vac supply.

A single output unit is also available in a 12.5mm wide DIN rail box, please specify TC-TC.

Inputs

Standard Ranges are shown below - contact Sales for others.

Thermocouples

Types E,J,K,N,R,S,T,B linearised or non-linearised

Ranges: A wide range of input ranges.

Cold junction compensation (can be turned off)

Upscale or downscale t/c burnout options

Outputs


Re-transmission of input value in mV

Selectable linearisation options and optional CJC

One output can be mV the second 4-20mA or Voltage

Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage	12	24V	36Vdc/32Vac	90 to 264 for ac input version
Supply Current (mA)		95	120	For 24 V dc supply (260mA for 50ms on start-up)
Input Impedance (Volt)		>10MΩ		Dependent on range (Typ=10V)
Output Linearity Error		±0.01%	±0.05%	
Temp Coefficient			±50ppm/°C	
Load Resistance Error			-	Not applicable
Time Constant (10-90%)	25ms (fast)	60ms (normal)		Selectable fast/normal response
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage ^{see note 1}	1kV			
Surge Voltage	2.5kV for 50µs		Transient of 10kV/µs	
Notes	Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Accuracy figures based on 24Vdc supply, Device is protected against reverse polarity connection. ISOCON does NOT provide safety isolation when the input is connected to the mains.			

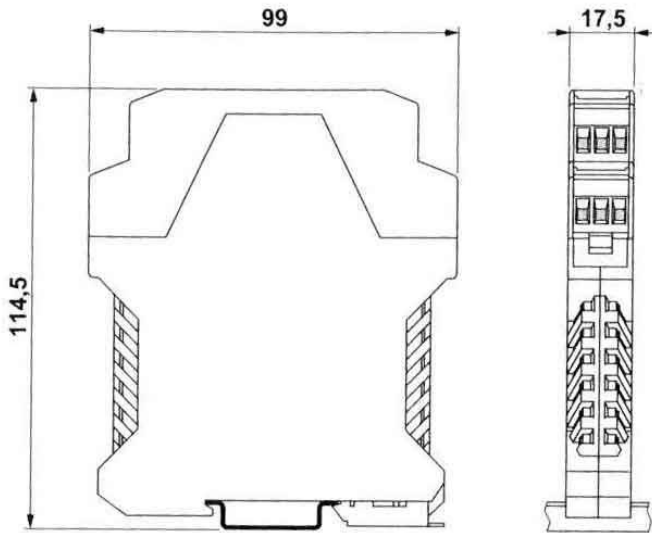

Installation data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 115g

Connection details

1.	Power Input	-ve
2.	Power Input	+ve
4.	Process Input	-ve
5.	Process Input	+ve
6.	T/C Shield	
10.	Output 2-ve	7. Output 1-ve
12.	Output 2+ve	9. Output 1+ve

Ordering information

Please supply:	
Part Number:	II-DCON-TCTC-6-TJJJ-JJ-000
Input Type:	e.g Type K T/C
Input Range:	e.g 0-500°C
Power Supply:	-6 (DC) or -3 (AC)
Isolation:	Full 3-Port
Options:	Linearisation / CJC
Single Output Version	TC-TC