








DUALCON-AVE

AVERAGING SIGNAL CONVERTER - 2 OUTPUTS



-  Universal inputs- user selectable
-  Outputs averaged over between 1s & 60s
-  Can eliminate glitches in input signal
-  Wide range AC or DC Supply
-  Isolated Transmitter Supply
-  Very High Accuracy, Low Cost
-  Only 17.5mm Wide on DIN rail

Description

The new **DUALCON-AVE** Isolating Signal Converter can accept a wide range of inputs including 4-20mA, thermocouple, RTD and voltage signals. The units produce high level DC outputs of either voltage or current. These outputs can be averaged over any time period between 1 second and 60 seconds.

Full 3 port isolation is standard as is an isolated transmitter supply which can be used to power any standard 2-wire 4-20mA transmitter.

The input type and range can be user selected using simple DIL switches inside the unit. All RTD and Thermocouple inputs can be fully linearised.

Non-interactive zero and span controls make adjustment of the unit quick and simple.

Other features include optional inversion of the input signal.

The unit is supplied with two power supply options, either wide ranging ac or dc. The ac version operates from any supply from 90 to 264 Vac and the dc version operates from 12 to 36 Vdc.

For specials such as custom linearisation, frequency input and maths

Outputs

DC Current and Voltage

0-20mA, 4-20mA, 0-10mA into 750Ω

0-1V, 0-10V, 1-5V into a minimum 100kΩ

Others available up to a maximum of:

Current: 0-20mA. Voltage: 0-10Vdc

Inputs

Standard Ranges are shown below - contact Sales for others.

DC/AC Current & Voltage

0-20mA, 4-20mA, 0-10mA into 15Ω

0-1V, 0-10V, 1-5V into 1MΩ

Min & Max Full Scale Ranges are:

DC Current	0 - 1mA	0 - 5A
Bipolar DC Current	±5mA	±10mA
DC Voltage	0 - 1V	0 - 300V*
Bipolar DC Voltage	±5V	±10V
2 Wire Pot	0 - 125Ω	0 - 1kΩ
3 Wire Pot	0 - 1kΩ	0 - 100kΩ

* Note: For input voltages greater than 60Vdc a Divider unit must be specified.

Thermocouples

Types E,J,K,N,R,S,T,B linearised or non-linearised

Ranges: Wide range of inputs

Cold junction compensation (can be turned off)

Upscale or downscale t/c burnout options

Resistance Thermometers

2, 3 or 4 wire PT100 or PT1000, linearised or non-linearised


Ranges: Wide range of inputs

Upscale or downscale RTD burnout options

The time average can be factory set or changed by the user using the internal DIP switches between 1s and 60s, other time periods are possible please enquire.

Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage	12	24V	36Vdc/32Vac	90 to 264 for ac input version
Supply Current (mA)		45	85	For 24 V dc supply (260mA for 50ms on start-up)
Input Impedance (Volt)		1M Ω		Dependent on range (Typ=10V)
Input Impedance (mA)		15 Ω		Dependent on range (Typ=20mA)
Volt drop (mA input)		0.3		At 20mA input
Output Linearity Error		$\pm 0.01\%$	$\pm 0.05\%$	
Temp Coefficient			$\pm 50\text{ppm}/^\circ\text{C}$	
Load Resistance Error			$\pm 5\text{ppm}/\Omega$	$0 < R_L < 750\Omega$
Time Constant (10-90%)	25ms (fast)	60ms (normal)		Selectable fast/normal response
Operating Ambient	0 $^\circ\text{C}$		55 $^\circ\text{C}$	
Relative Humidity	0%		90%	
Isolation Voltage <small>see note 1</small>	1kV			
Surge Voltage	2.5kV for 50 μs		Transient of 10kV/ μs	
Notes	Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Accuracy figures based on 24Vdc supply, 4-20mA output with 250 Ω load and 20 $^\circ\text{C}$ ambient. Device is protected against reverse polarity connection. ISOCON does NOT provide safety isolation when the input is connected to the mains.			

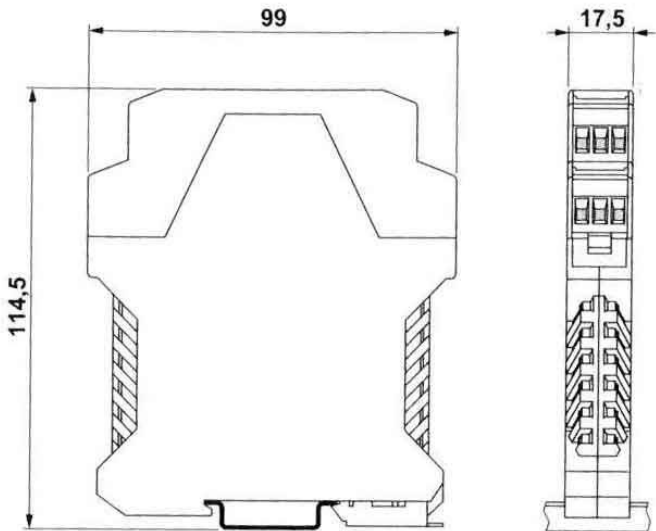

Installation data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 95g

Connection details

1.	Power Input	-ve		
2.	Power Input	+ve		
4.	Process Input	-ve	T/C -ve	RTD -ve
5.	Process Input	+ve	T/C +ve	RTD +ve
3.	Trans supply	+ve		RTD 4 th Wire
6.			T/C Shield	RTD 3 rd Wire
10.	Output	-ve	7.	Output 1-ve
12.	Output	+ve	9.	Output 1+ve

Ordering information

Please supply:	
Part Number:	II-DCON-AVE-3-JJJJ-JJ-0-000
Input Type:	e.g mA, Volt, T/C, RTD
Input Range:	e.g 4-20, 0-10, 0-500 $^\circ\text{C}$
Output Type:	e.g mA, Volt
Output Range:	e.g 4-20mA, 0-10V
Power Supply:	-6 (DC) or -3 (AC)
Isolation:	Full 3-Port
Options:	Specify time period if Factory Calibration required

Email: sales@industrialinterface.co.uk

Web: www.industrialinterface.co.uk



www.facebook.com/Industrial.Interface

@IndustrialInter

Industrial Interface Ltd

